



DROMATIC SYSTEM 06

Valves and Junctions

Series 06

INSTRUCTION AND PRODUCT DATA SHEET

ENGLISH

DESCRIPTION:

The DROMATIC 06 is a Single Line, Positive Displacement System for use with oil or light grease. The valves are available either with compression fitting for 4 mm. tube or with 'push-in' fitting for 4 mm. nylon tube. The discharge is preset at 0,03cc. , 0,06cc. , 0,10cc. or 0,16cc. The junctions are available in our standard sizes or a special *Accumino* interchangeable version. These can be directly interchanged for customers using the *Accumino System*.

SPECIFICATION:


Lubricant Range: 1000 cSt - 15cSt Oil
NLGI-00 Grease

Working pressure: 15 to 40 bar (217 to 580 psi.)

Capacity: 0,03cc./0,06cc./0,10cc./
0,16cc. cycle fixed

Min pause time: 40 seconds.



Valve type: Direct.

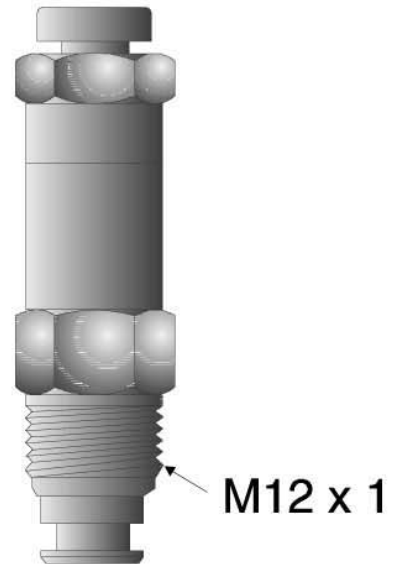

ORDERING INFORMATION:

Metering Valves (Compression Fitting).

Metering Valves (Push-in):

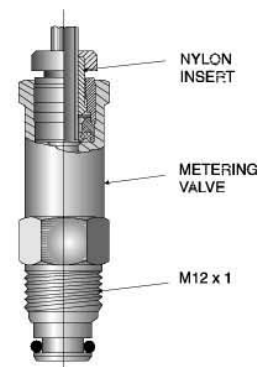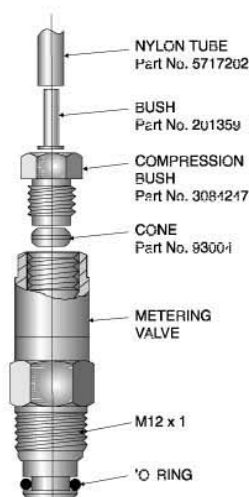


Part No.	Delivery cc.	Marking on valve
3083410	0,03	3
3083411	0,06	6
3083412	0,10	10
3083413	0,16	16

Part No.	Delivery cc.	Marking on valve
3083458	0.03	3
3083459	0.06	6
3083460	0.10	10
3083461	0.16	16

Standard Junctions:

Part No.	No. of outlets
3071221	1
3071222	2
3071223	3
3071224	4
3071225	5
3071226	6
3071227	7
3071228	8

STANDARD JUNCTIONS

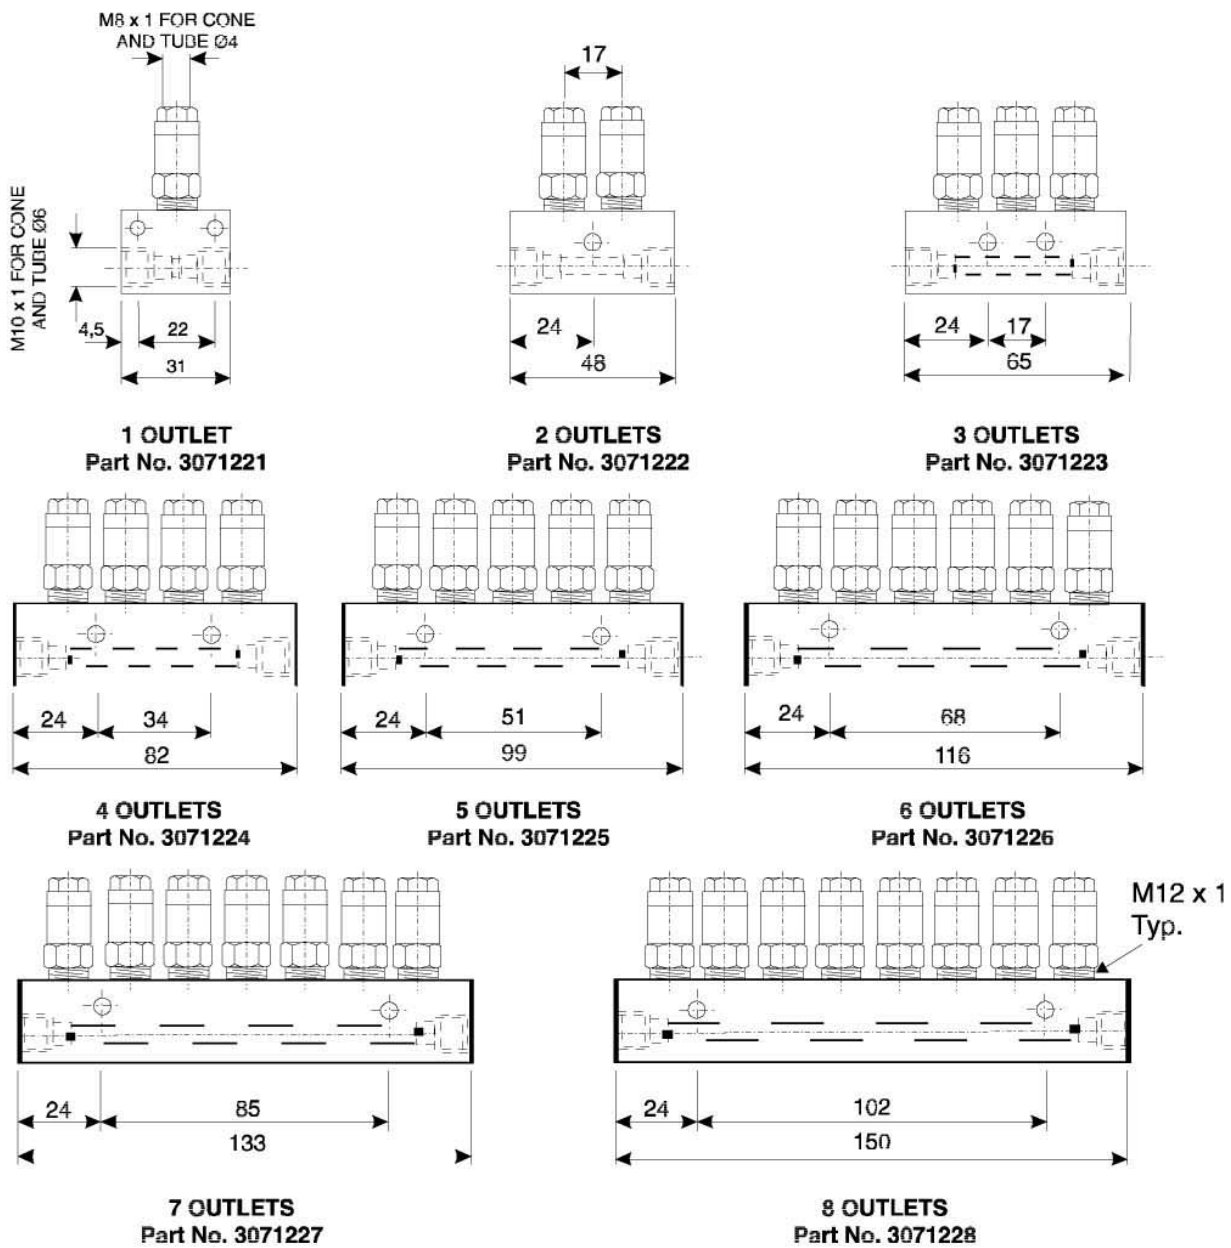



Accumino - Interchangeable Junctions:

Single Row:

Part No.	No. of outlets	Dim. 'X'	Dim. 'Y'
3071241	1	40	20
3071242	2	61	41
3071243	3	82	62
3071244	4	103	83
3071245	5	124	104
3071246	6	145	125
3071247	7	166	146
3071248	8	187	167


Double Row:

Part No.	No. of outlets	Dim. 'X'	Dim. 'Y'
3071251	2	40	20
3071252	4	61	41
3071253	6	82	62
3071254	8	103	83
3071255	10	124	104
3071256	12	145	125

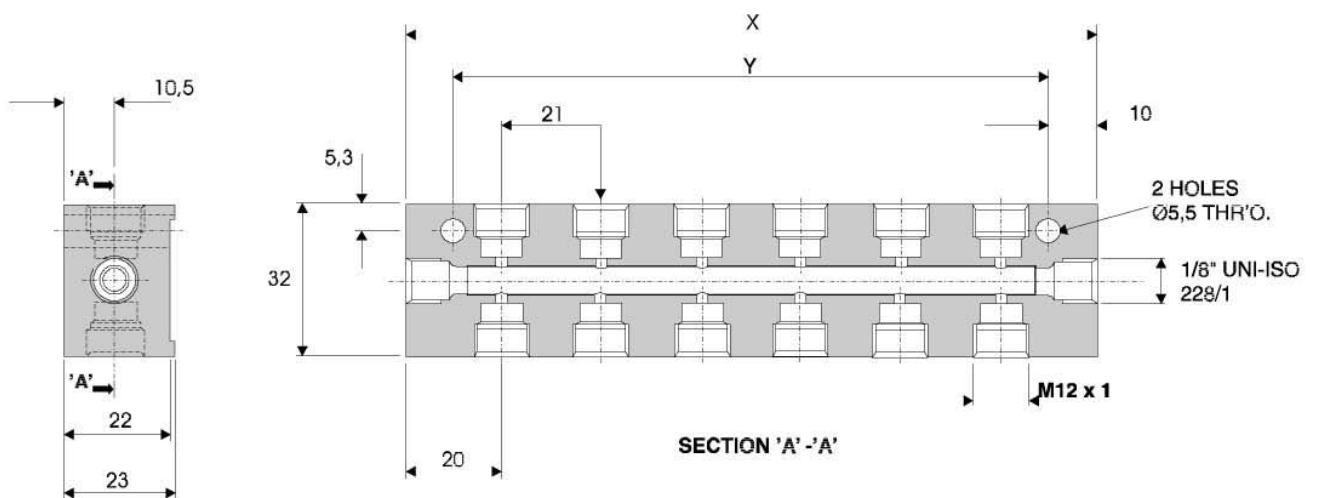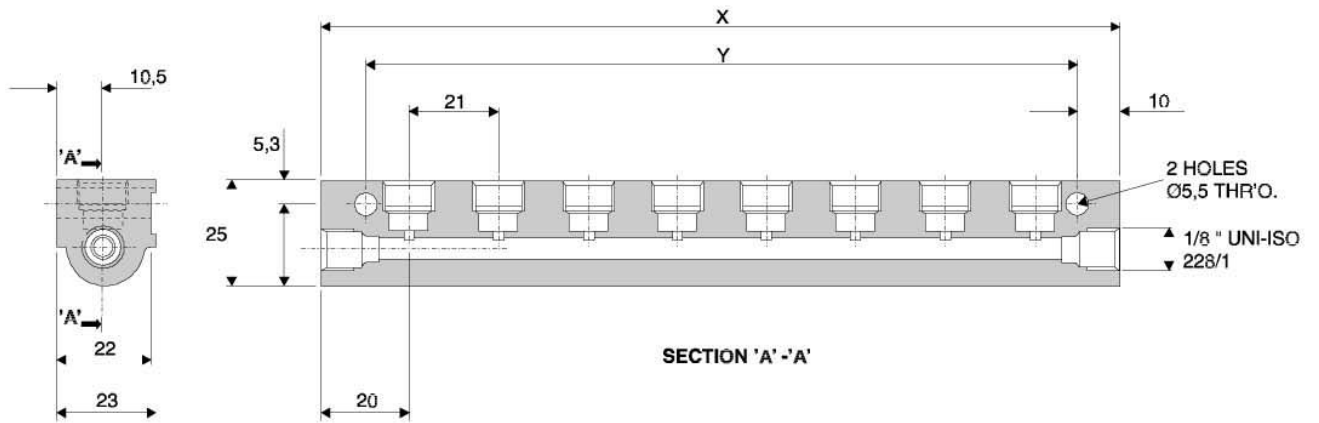


INSTALLATION:

Dimensions of Valves Assembled to Junctions

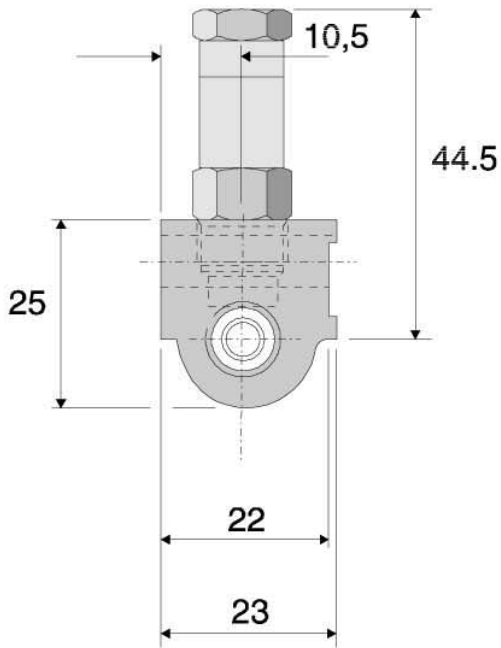


Metering Valve (compression fitting) in Accumino Interchangeable Junctions.

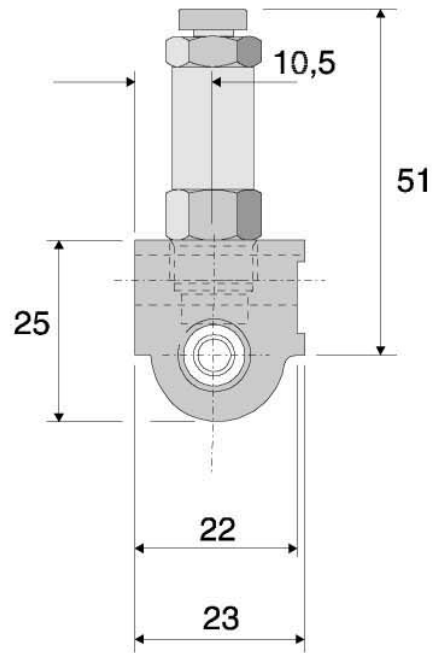

Metering Valve (compression fitting) in Standard Junction.

Metering Valve (push-in) in Accumino Interchangeable Junctions.

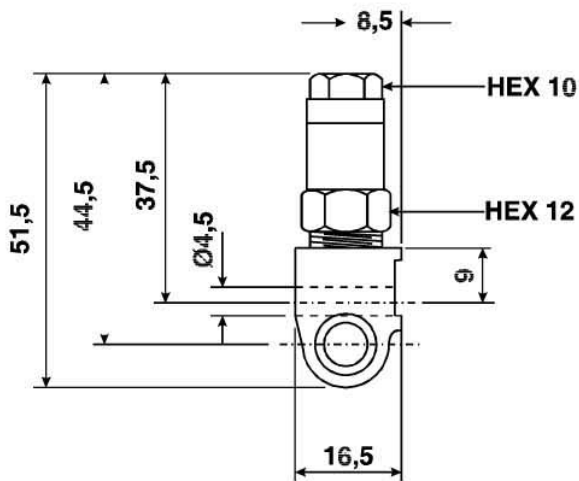

ITALY
Dropsa SpA
t.(+39) 02-250791
f.(+39) 02-25079767

U.S.A.
Dropsa Corporation
t.(+1) 586-566-1540
f.(+1) 586-566-1541

BRAZIL
Dropsa
t.(+55) 011-563-10007
f.(+55) 011-563-19408

AUSTRALIA
Dropsa Australia Ltd.
t.(+61) 02-9938-6644
f.(+61) 02-9938-6611

SPAIN
Polydrop, S.A.
t.(+34) 93-260-22-50
f.(+34) 93-260-22-51

U.K.
Dropsa (UK) Ltd
t.(+44) 01784-431177
f.(+44) 01784-438598

GERMANY
Dropsa GmbH
t.(+49) 0211-394-011
f.(+49) 0211-394-013

FRANCE
Dropsa Ame
t.(+33) 01-3993-0033
f.(+33) 01-3986-2636

© Copyright Dropsa - all rights reserved. Reproduction of any part of this document is strictly forbidden without prior consent from Dropsa.