

MLP-Mobile lube pump

ELECTRIC GREASE PUMP
FOR MOBILE
APPLICATIONS



Automatic Lubrication Systems

MLP
Mobile Lube Pump
GB
USA

MLP-Mobile lube pump

ELECTRIC GREASE PUMP FOR MOBILE APPLICATIONS.

The MLP Electric Grease Lubrication Pump is particularly suitable for Mobile lubrication applications, where outdoor installation is necessary.

It can be fitted with up to 3 pump outlets and used with progressive divider systems to construct a fully automatic mobile lubrication system.

The unit has a choice of three sizes of reservoir all provided with the magnetic sensor for the minimum level. It can also incorporate a Cycle-Dwell/Cycle or Dwell-Sensor Timer! (Dwell-sensor will stop the pump after reading a cycle from a progressive distributor valve)





GENERAL FEATURES	
Operating Temperature	From - 15°C to + 80°C (+ 5 °F to + 176 °F)
Number of Outlets	1 standard, 3 max
Grease	NLGI 2 max
Operating Voltage	12 V DC - 24 V DC 110 V AC - 230 V AC
Power Consumption	80 V A

PUMPING ELEMENT	
Delivery per min at 20°C (+68°F)	c. 2.8 cm ³ (0.17 cu.in)
Outlet Port	1/4" BSP
Incorporated Pressure by-pass	250 bar standard (3675 psi)
Nonreturn valve	Included on outlet.

OPTIONAL TIMER MODULE	
Work Time (ON Time)	Min. 20 sec. - max 8 min.
Pause Timer (OFF Time)	Min. 5 min. - max 12 hr.
Short-circuit protection	Included

ORDERING INFORMATION

Voltage	STANDARD (NO TIMER)			DWELL-ON TIMER			DWELL-SENSOR TIMER		
	Reservoir 2 kg. 4.4 lb	Reservoir 4 kg 8.8 lb	Reservoir 8 kg 17.6 lb	Reservoir 2 kg 4.4 lb	Reservoir 4 kg 8.8 lb	Reservoir 8 kg 17.6 lb	Reservoir 2 kg 4.4 lb	Reservoir 4 kg 8.8 lb	Reservoir 8 kg 17.6 lb
12V	888300	888301	888302	888312	888313	888314	888324	888325	888326
24V	888303	888304	888305	888315	888316	888317	888327	888328	888329
110V	888306	888307	888308	888318	888319	888320	888330	888331	888332
230V	888309	888310	888311	888321	888322	888323	888333	888334	888335

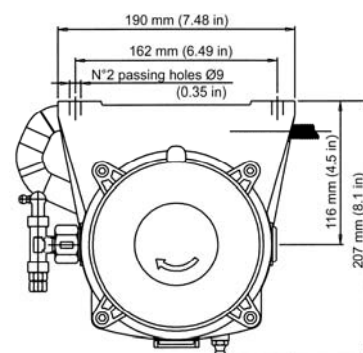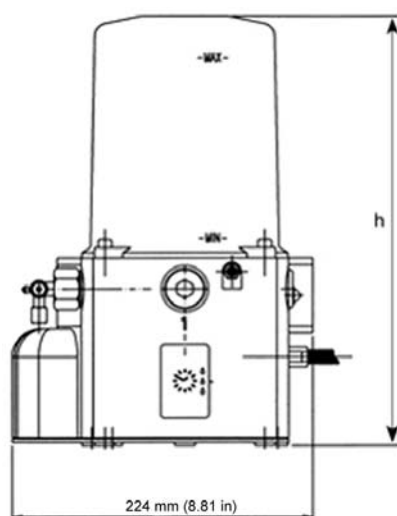

Dimensions				
		2 kg 4.4 lb	4 kg 8.8 lb	8 kg 17.6 lb
h	mm.	320	340	515
	inch.	12.59	13.38	20.27

Web site:
<http://www.dropsa.com>

E-mail:
sales@dropsa.com

WK 29/05
C2059PE

ITALY
Dropsa SpA
t.(+39) 02-250791
f.(+39) 02-25079767

SPAIN
Polydrop, S.A.
t.(+34) 93-260-22-50
f.(+34) 93-260-22-51

U.S.A.
Dropsa Corporation
t.(+1) 586-566-1540
f.(+1) 586-566-1541

U.K.
Dropsa (UK) Ltd
t.(+44) 01784-431177
f.(+44) 01784-438598

BRAZIL
Dropsa
t.(+55) 011-563-10007
f.(+55) 011-563-19408

GERMANY
Dropsa GmbH
t.(+49) 0211-394-011
f.(+49) 0211-394-013

AUSTRALIA
Dropsa Australia Ltd.
t.(+61) 02-9938-6644
f.(+61) 02-9938-6611

FRANCE
Dropsa France
t.(+33) 01-3993-0033
f.(+33) 01-3986-2636