

FEATURES

- SUITABLE FOR LUBRICANT:
GREASE MAX NLGI 2

DL-1 INJECTORS

The DL-1 injector was developed to provide precise lubricant to the lubrication point through the pressure of the supply line. This allows for many DL1s to be installed in line within a small space envelope.

The flow is adjustable from the outside which allows for the user to set the required lubricant.

These injectors have a visual indication pin incorporated within the valve to confirm proper lubrication. The valves are mounted of manifolds available from 1 to 5 outlets.

Each DL1 can be easily inspected, assembled or disassembled from the manifold without removing any fittings or tubing.

They can be mounted in any direction or mounted on other customised manifolds that DropsA can supply.




APPLICATIONS

- WIND TURBINES
- OVERHEAD CRANES
- MACHINE TOOLS
- CANNING LINES
- EARTHMOVER

ADVANTAGES


- MODULAR
- EASY INSTALL OF SYSTEM

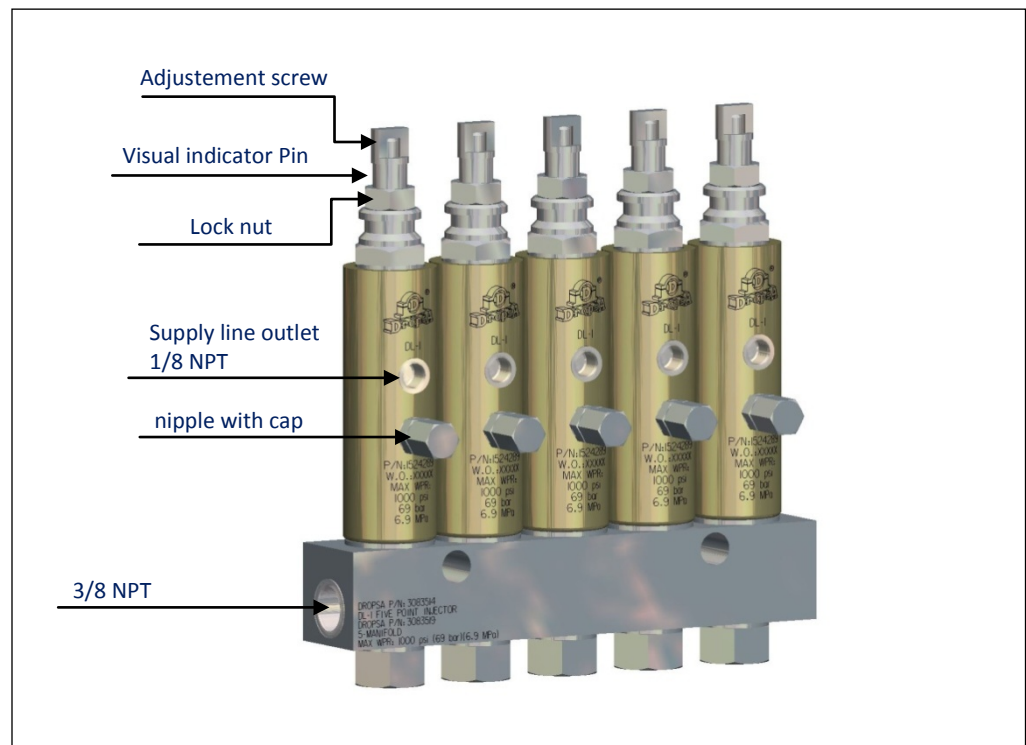

TECHNICAL CHARACTERISTICS

LUBRICANTS	FLOW RATE		OPERATING PRESSURE			
	Min	Max	Min	Max	Typical	Recharge
Max NLGI 2	0,13 cm ³ (0,008 cu.in.)	1,3 cm ³ (0,100 cu.in.)	130 bar (1850 psi)	250 bar (3500 psi)	172 bar (2500 psi)	41 bar (600 psi)

DIMENSIONS

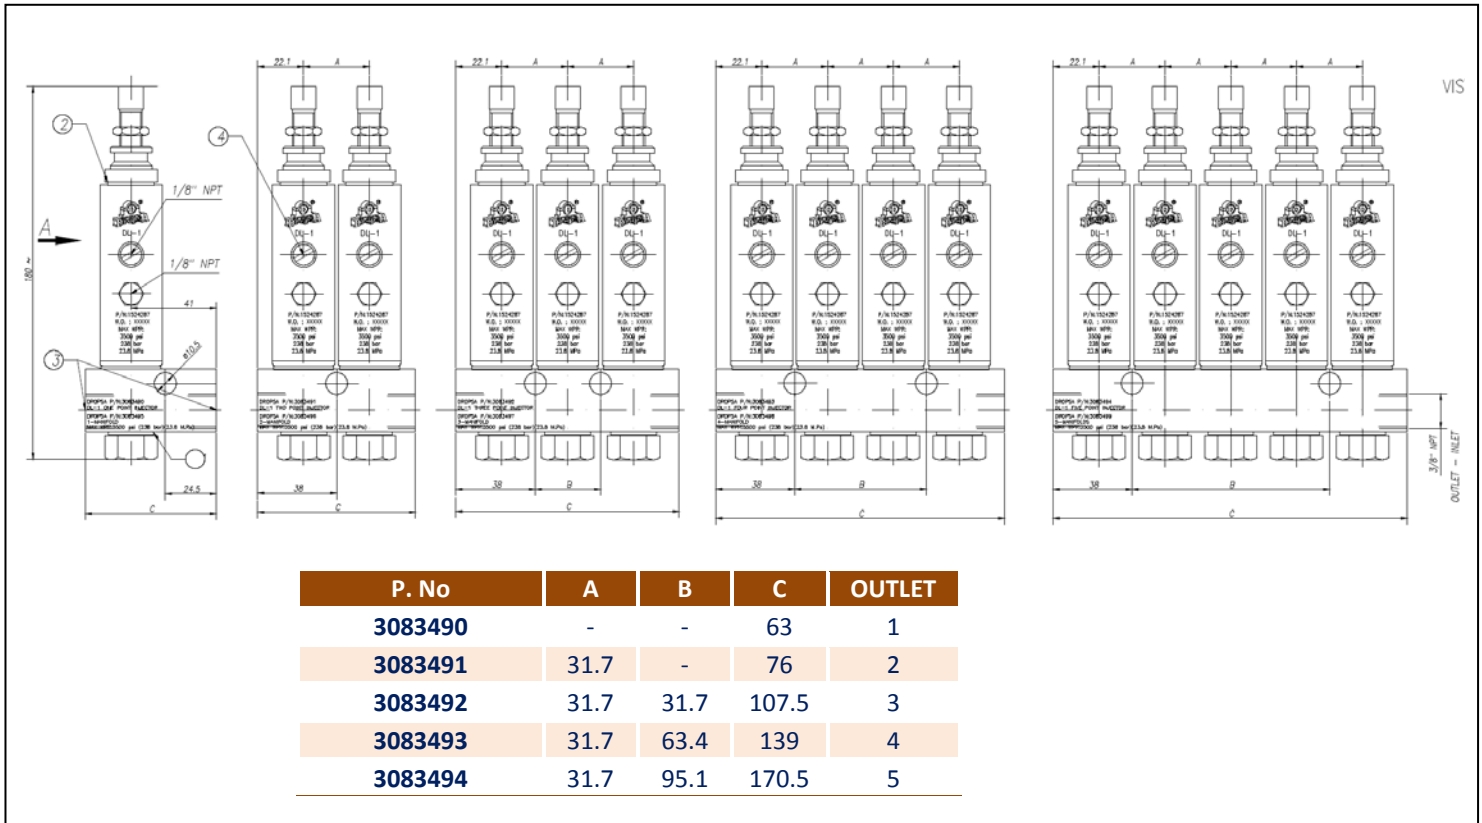

ORDERING INFORMATION

DESCRIPTION	OTULET	PART No.	Q.ty
DL1 - 1	1	3083490	
DL1 - 2	2	3083491	
DL1 - 3	3	3083492	
DL1 - 4	4	3083493	
DL1 - 5	5	3083494	

SPARE PARTS

DESCRIPTION	PART No.	Q.ty
Grease replacement injector	1524287	
Metal injector cover	3072572	
Plastic injector cover	3132197	
Injector repair kit	3132187	

Info Distributor: