

CHARACTERISTICS

- FLOW RATE: 15 L / MIN. MAX
- OPERATING PRESSURE 400 BAR PMAX
- TWO-WAY FLOW
- NO INTERACTION BETWEEN ELEMENTS ADN FLUID
- NO ENCRUSTATION OR LOCK DUE TO HIGH TEMPERATURES
- FOR HIGH VISCOSITY LUBRICANT
- CONE VALVE
- WITH ELECTRIC CONNECTOR
- FLUIDS: OIL
800cST MAX GREASE
NLGI 2 MAX


SECTION VALVES LINE 2/2

This reverses solenoid valves are designed to control the supply of lubrication systems. These valves are able to operate with grease at a maximum pressure of 400 bar (5880 psi).

Its function is to dissect a branch of the system.




SYMBOLS

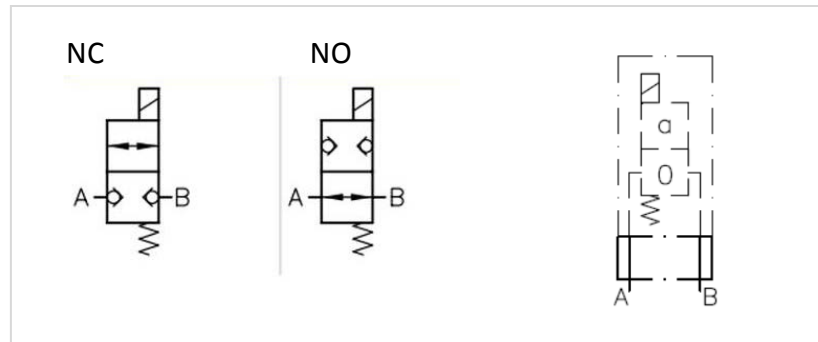


TECHNICAL INFORMATION

TECHNICAL FEATURES	
Maximum capacity	15 l/min MAX
Operating pressure	400 bar MAX
Type of construction	Seated cone valve
Fixing and pipe	Mounting base plate and connection block
Mounting position	Preferably vertically with the actuator upwards
Flow direction	Bidirectional
Drive	Electric
Temperature	- 40°C ÷ + 80°C
Oil temperature	-25 °C ÷ + 80°C

Δ p-Q Characteristics (approximate values)

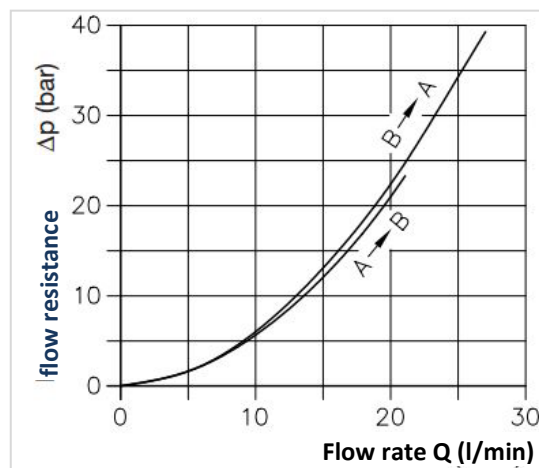


ELECTRICAL CONNECTIONS

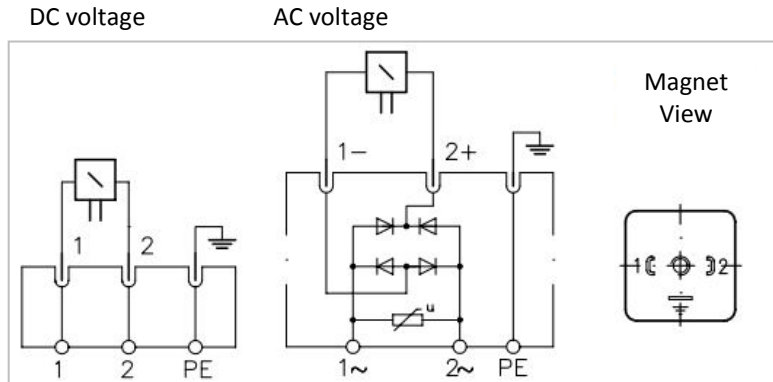


DIMENSIONS

Adapter may be mounted, rotated by 22.5° or 180°


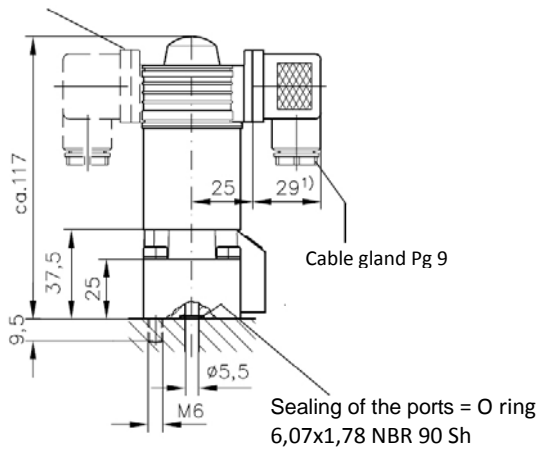


Manual emergency actuation

Press down the solenoid pin hidden under the rubber cap, max. actuation force 80 (N).



BLOCKS OF ATTACK



ATTACKS A,B ISO 228/1	H	B	a	a1	a2	l	l1
G 1/4	30	45	29	21	20	10	5
G 1/8	30	45	27	23	18	10	5
G 1/2	45	50	25	25	--	10	5

ORDERING INFORMATION

DESCRIPTION	INLET	FUNCTION	VOLTAGE	CODE	Q.ty
ELECTRIC SOLENOID	1/4 G 228/1	NC	24V DC	3155195	<input type="radio"/>
	3/8 G 228/1	NC	110V 50/60 Hz	3155204	<input type="radio"/>
	1/2 G 228/1	NC	24V DC	3155217	<input type="radio"/>
	1/4 G 228/1	NA	24V DC	3155232	<input type="radio"/>

Info Distributor: