



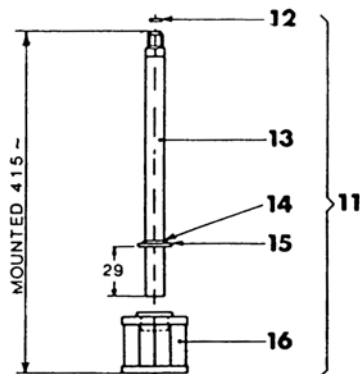

MOTOR - DRIVEN GEAR PUMP
DISCHARGE 0,5 L/1' - 1,350 REVOLUTIONS

3407000

MOTOR MEC SERIES 63

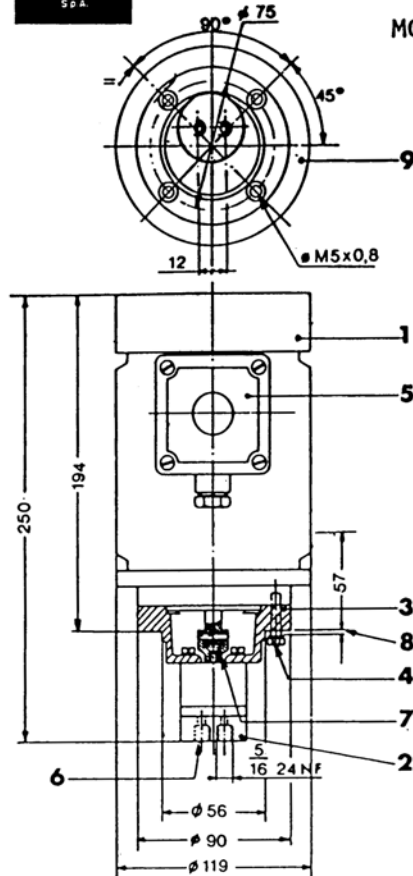

- MAX. PRESSURE FOR CONTINUOUS SERVICE: 20 KG/SQ.CM.
- MAX. PRESSURE FOR 50% INTERMITTENT SERVICE: 70 KG/SQ.CM. (MAX.TIME UNDER LOAD: 30 MINUTES)
- ROTATION: CLOCKWISE OR COUNTER-CLOCKWISE, CONVERTING SUCTION WITH DELIVERY HOSE;

- 1 3301104 - 220/380 volts - 50 CYCLES-0.185 kW - 1,350 R.P.M. THREE-PHASE MOTOR - MEC SERIES 63.
- 2 201080 - GEAR PUMP, DISCHARGE 0,5 L/1' -1,350 REVOLUTIONS.
- 3 3045111 - PUMP FIXING FLANGE.
- 4 10021 - 4, Ø M5x0,8 PUMP FIXING SCREWS. - 30 MM LONG.
- 5 - MOTOR FEEDING TERMINAL BOX, NORMALLY CONNECTED AT 380 VOLTS.
- 6 - Ø 5/16"-24 NF DELIVERY AND SUCTION HOLES, 8 MM DEPTH, 12 MM CENTER.
- 7 3200105 - MOTOR-PUMP COUPLING.
- 8 - THICKNESS OF MOUNTING WALL: 3 MM
- 9 - MOUNTING FLANGE DIMENSIONS AND CENTERS.

TO BE ORDERED SEPARATELY

- 11 3088055 - FILTER ASSEMBLY, CONSISTING OF:
 - 12 3190117 - COPPER GASKET.
 - 13 3088050 - 10x8 DIA.ZINC PLATED SUCTION TUBE, NORMALLY SUPPLIED MOUNTED IN LENGTH OF 415 MM.PLACE RING 14 AS SHOWN AT LEFT BEFORE CUTTING TUBE IN THE LENGTH REQUIRED. CAUTION - TUBE SHOULD BE TRIMMED AND BLOWN AFTER CUTTING. IT IS ADVISABLE TO USE TUBE CUTTER PART.No.2038452.
 - 14 59534 - RING-TYPE RETAINER
 - 15 3233111 - COLLAR
 - 16 3130052 - 400 MESH/SQ.CM. FILTER - STAR-SHAPED STEEL WIRE. AMPLE FILTERING AREA.FILTER SHOULD BE CLEANED AT LEAST ONCE A YEAR. REMOVE RESERVOIR, WASH FILTER WITH BENZINE OR PETROL AND RINSE WITH LIGHT OIL BEFORE REASSEMBLING.

WEIGHT: 5.500 KG-(MOTOR DRIVEN PUMP+FILTER+MOUNTING BRACKET).

Web site:
<http://www.dropsa.com>

E-mail:
sales@dropsa.com

WK 05/75
 7170503

ITALY
 Dropsa SpA
 t.(+39) 02-250791
 f.(+39) 02-25079767

SPAIN
 Polydrop, S.A.
 t.(+34) 93-260-22-50
 f.(+34) 93-260-22-51

U.S.A.
 Dropsa Corporation
 t.(+1) 586-566-1540
 f.(+1) 586-566-1541

U.K.
 Dropsa (UK) Ltd
 t.(+44) 01784-431177
 f.(+44) 01784-438598

BRAZIL
 Dropsa
 t.(+55) 011-563-10007
 f.(+55) 011-563-19408

GERMANY
 Dropsa GmbH
 t.(+49) 0211-394-011
 f.(+49) 0211-394-013

AUSTRALIA
 Dropsa Australia Ltd.
 t.(+61) 2-9938-6644
 f.(+61) 2-9938-6611

FRANCE
 Dropsa France
 t.(+33) 01-3993-0033
 f.(+33) 01-3986-2636